

# DuoFoam™

with **SELF SEAL**



#### For Use Under

- Laminate
- Engineered Wood

#### Installation Methods

- Floating Floors



#### **COST EFFICIENT**

Affordable and capable, high-quality protection for your floor.




#### **MOISTURE PROTECTION**

MoistureBlock helps to protect floors from harmful moisture especially over concrete subfloors.



#### **SELF-SEALING INSTALLATION**

Features user-friendly moisture-resistant tape along the border for ease of installation.

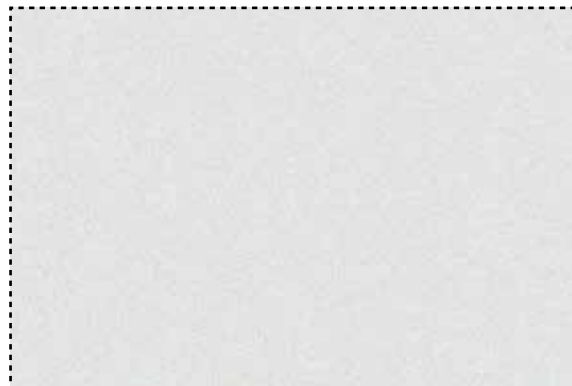

## INSTALLATION METHODS

### FLOATING FLOORS

1. Roll out underlayment vapor barrier side up and butt seams together
2. Tape seams with provided lip & self seal tape
3. Click & lock floating floors over the top according to manufacturer

\*ENSURE TO READ THE COMPLETE INSTALLATION INSTRUCTIONS BEFORE INSTALLATION

### ADVANTAGES

- Polyethylene Foam with special moisture resistant film
- Economical
- Humidity, Mold and Mildew resistant
- Patented Lip & Tape strip for additional moisture protection and ease of installation
- Made with recycled materials.

### LIMITATIONS

DuoFoam is not suitable for use as underlayment for:

- Ceramic tile
- Carpet
- Sheet-vinyl
- VCT

Installations over concrete in high moisture areas (vapor emission rate above 3 lbs/ 1000 sq ft/ 24 hrs) will require additional protection such as a concrete sealant or polyethylene vapor barrier.

### APPROVED SUBSTRATES

- Dry, completely cured concrete (at least 28 days old)
- Concrete and masonry blocks
- Cement backer units (CBU)
- Cementitious screeds, leveling coats and mortar beds
- Waterproofing and crack-isolation membranes
- Double layered exterior-grade plywood 1 ¼" (32 mm) total thickness, for residential floors and in dry areas only.
- Cement terrazzo floors

### PACKAGING

40" x 30.03' (100 sq ft) do-it-yourself size rolls

15 rolls per box      10 boxes per pallet      150 rolls per pallet

28 pallets per Truck      4200 roll per Truck

Stock Colors: White foam and clear film

## TECHNICAL DATA

Product Thickness ..... 2 mm  
Density ..... 1.4#  
WVTR.....6.95 g/m<sup>2</sup>/24 hour day (.45 g/100in<sup>2</sup>/ 24 hour day)

## SOUND PROPERTIES

NOT AVAILAIBLE FOR THIS PRODUCT



SS080400100E